

1

2










3

4

5

6

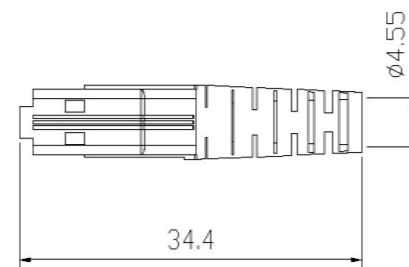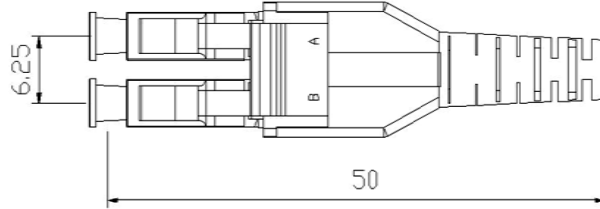

NUMBER	PART	MATERIAL
1	HOUSING	ABS/PC
2	DUST CAP	PE
3	BOOT	TPR
4	FERRULE	ZrO2



NOTES:

- LC DUPLEX TYPE.
- INSERTION LOSS: <0.2DB.
- OPERATING TEMPERATURE: -20°C to +70°C.
- STORAGE TEMPERATURE: -40°C to +80°C
- PACKAGING QUANTITY 100PIECE
- THIS PRODUCT COMPLIES WITH ROHS.
- COLOR: BLUE, GREEN, GRAY, AQUA, E-V

Material		
ITEMS	SPECIFICATIONS	QTY
1		
2		
3		

x. ± 5	x° ± 5°	ECN.NO.	UNITS							
.x ± 0.05	.x° ± 0.1°		mm							
.xx ± 0.01	.xx° ± 0.05°	DRAWER	MAT'L							
.xxx ± 0.001	.xxx° ± 0.01°	L	N/A							
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF INTERNATIONAL.SUCH INFORMATION SHALL NOT BE REPRODUCED NOR DISCLOSED WITHOUT THE WRITTEN			APPD.	TITLE: LC UNIBOOT CONNECTOR						
			RFV	DWG NO.: GSCON01005						
			A	DATE 2018-4-12						
				 <table border="1"> <thead> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> </thead> <tbody> <tr> <td>N/A</td> <td>1/1</td> <td>A</td> </tr> </tbody> </table>	SCALE	SHEET	REV.	N/A	1/1	A
SCALE	SHEET	REV.								
N/A	1/1	A								

1

2

3

4

5

6