

1

2





3

4

5

6

NUMBER	PART	MATERIAL
1	ADAPTER BODY	ABS/PC
2	SPRING CLIP	SUS304
3	DUST PLUG	ABS/PC
4	SC SLEEVE	Zr02

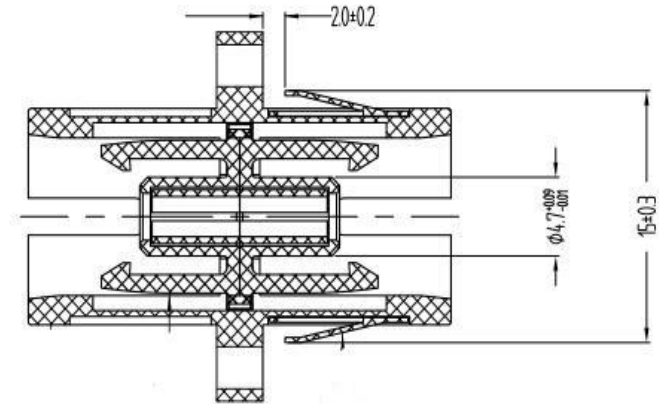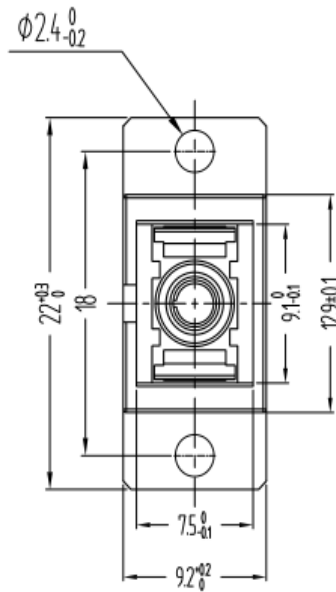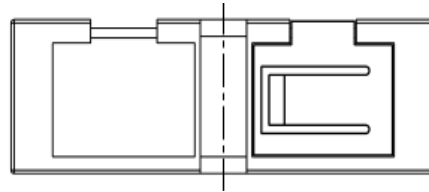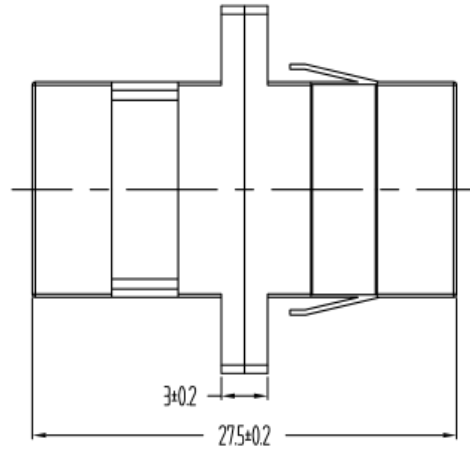

NOTES:

1. SC Simplex Type.
2. Durability: 500 Cycles.
3. Tensile Strength: 10 kgf.
4. Insertion Loss: <0.2dB.
5. Operating TEMPERATURE: -20°C to +70°C.
6. Storage Temperature: -40°C to +80°C
7. Standard packing.
8. This product complies with ROHS.

Material		
ITEMS	SPECIFICATIONS	QTY
1		
2		
3		

x. ± 5	x°. ± 5°	ECN. NO.	UNITS	 GAUSS® connectivity solutions			
.x ± 0.05	.x° ± 0.1°		mm				
.xx ± 0.01	.xx° ± 0.05°	DRAWER	MAT'L	TITLE:			
.xxx ± 0.001	.xxx° ± 0.01°	L	N/A	SC Simplex adapter with Flange			
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF INTERNATIONAL.SUCH INFORMATION SHALL NOT BE REPRODUCED NOR DISCLOSED WITHOUT THE WRITTEN CONSENT OF INTERNATIONAL.		APPD.	FINISH	DWG NO.: ADA011012			
			N/A				
		RFV	DATE				
		A	2018/4/12				
				SCALE	SHEET	REV.	
				N/A	1/1	A	

1

2

3

4

5

6