

1

2



3

4

5

6

NUMBER	PART	MATERIAL
1	ADAPTER BODY	KIRSITE
2	DUST PLUG	PE
3	SLEEVE	ZrO2
4		

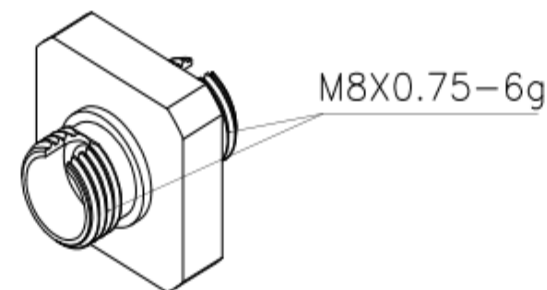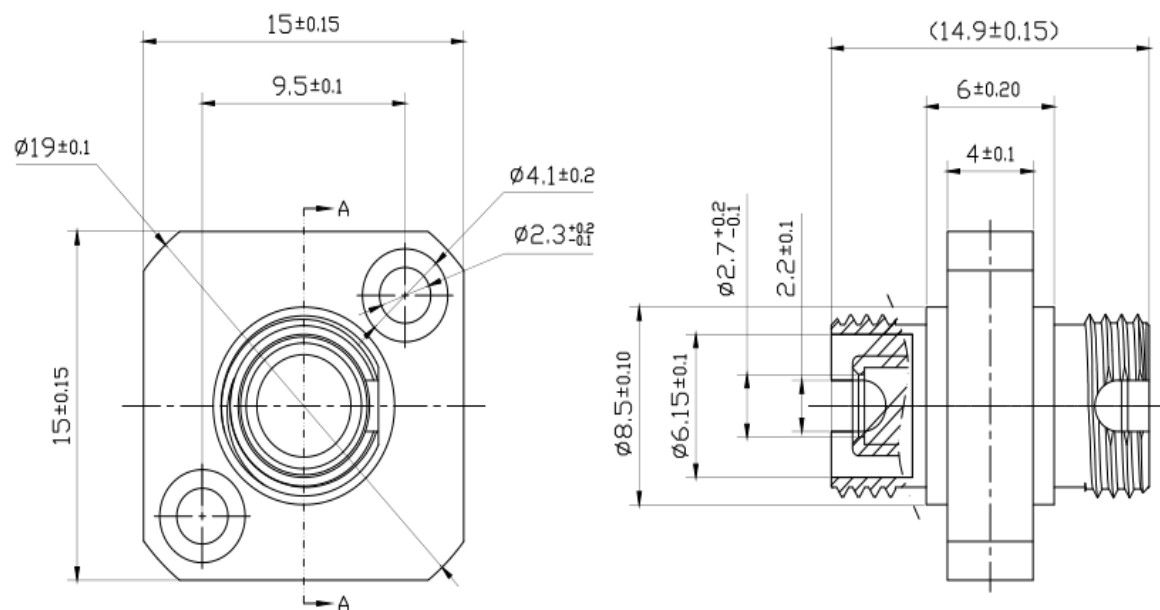

NOTES:

1. FC Simplex Type.
2. Durability: 500 Cycles.
3. Tensile Strength: 10 kgf.
4. Insertion Loss: <0.2dB.
5. Operating TEMPERATURE: -20°C to +70°C.
6. Storage Temperature: -40°C to +80°C
7. Standard packing.
8. This product complies with ROHS.

Material		
ITEMS	SPECIFICATIONS	QTY
1		
2		
3		

X. ± 5	x°. ± 5°	ECN. NO.	UNITS					
.x ± 0.05	.x° ± 0.1°		mm					
.xx ± 0.01	.xx° ± 0.05°	DRAWER	MAT'L	TITLE:				
.xxx ± 0.001	.xxx° ± 0.01°	L	N/A	FC Square-Type Adapter				
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF INTERNATIONAL.SUCH INFORMATION SHALL NOT BE REPRODUCED NOR DISCLOSED WITHOUT THE WRITTEN CONSENT OF INTERNATIONAL.		APPD.	FINISH	DWG NO.:			ADA014003	
			N/A					
		RFV	DATE			SCALE	SHEET	REV.
		A	2018/4/12			N/A	1/1	A