NUMBER	PART	MATERIAL
1	ADAPTER BODY	ABS/PC
2	SPRING CLIP	SUS304
3	DUST PLUG	PBT
4	LC SLEEVE	Zr02

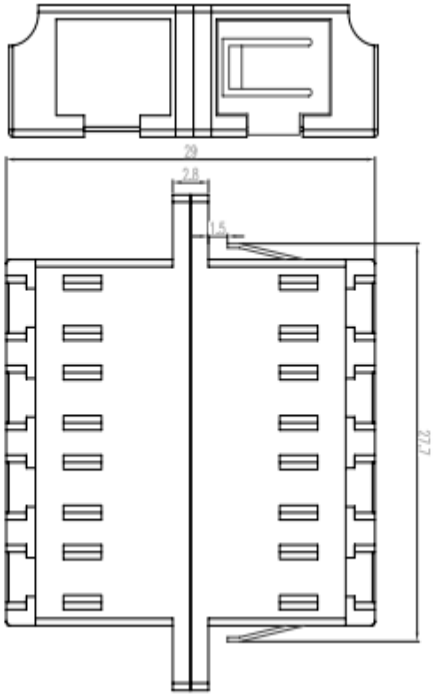

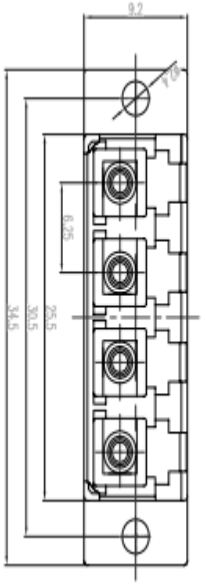

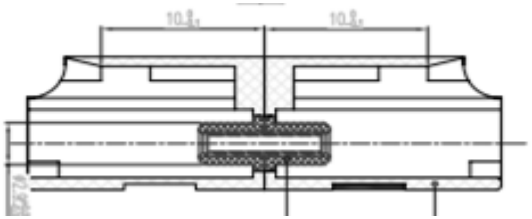

NOTES:

1. LC Quad Type.
2. Durability: 500 Cycles.
3. Tensile Strength: 10 kgf.
4. Insertion Loss: <0.2dB.
5. Operating TEMPERATURE: -20°C to +70°C.
6. Storage Temperature: -40°C to +80°C
7. Standard packing.
8. This product complies with ROHS.

Material		
ITEMS	SPECIFICATIONS	QTY
1		
2		
3		

x. ± 5	x°. ± 5°	ECN. NO.	UNITS mm	GAUSS connectivity solutions
.x ± 0.05	.x° ± 0.1°			
.xx ± 0.01	.xx° ± 0.05°	DRAWER	MAT'L N/A	TITLE: LC Quad Symmetry-Type adapter with Flange
.xxx ± 0.001	.xxx° ± 0.01°	L		
		APPD.	FINISH N/A	DWG NO.: ADA010018
		RFV	DATE 2018/4/12	SCALE N/A / SHEET 1/1 / REV. A
		A		

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF INTERNATIONAL.SUCH INFORMATION SHALL NOT BE REPRODUCED NOR DISCLOSED WITHOUT THE WRITTEN CONSENT OF INTERNATIONAL.