
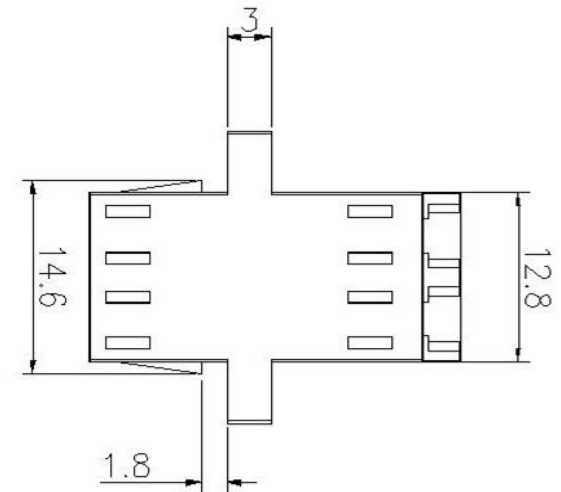
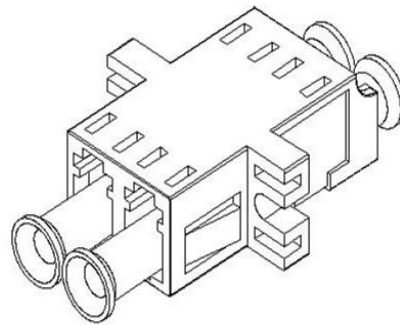



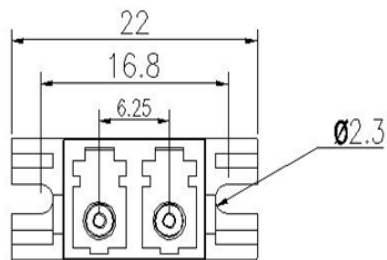

NUMBER	PART	MATERIAL
1	ADAPTER BODY	ABS/PC
2	SPRING CLIP	SUS304
3	DUST PLUG	PBT
4	LC SLEEVE	ZrO2

NOTES:

1. LC Duplex Type.
2. Durability: 500 Cycles.
3. Tensile Strength: 10 kgf.
4. Insertion Loss: <0.2dB.
5. Operating TEMPERATURE: -20°C to +70°C.
6. Storage Temperature: -40°C to +80°C.
7. Standard packing.
8. This product complies with ROHS.

Material		
ITEMS	SPECIFICATIONS	QTY
1		
2		
3		

x. ± 5	x°. ± 5°	ECN. NO.	UNITS	 GAUSS® connectivity solutions				D	
.x ± 0.05	.x° ± 0.1°		mm						
.xx ± 0.01	.xx° ± 0.05°	DRAWER	MAT'L	TITLE: LC DX SC-Type adapter with Flange					
.xxx ± 0.001	.xxx° ± 0.01°	L	N/A						
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF INTERNATIONAL.SUCH INFORMATION SHALL NOT BE REPRODUCED NOR DISCLOSED WITHOUT THE WRITTEN CONSENT OF INTERNATIONAL.		APPD.		FINISH N/A		DWG NO.: ADA010016			
		RFV		DATE		SCALE	SHEET	REV.	
		A		2018/4/12		N/A	1/1	A	